



795SS

and 790SS Hot Water Pressure Washers

North America's #1 Manufacturer of High-Quality Cleaning Equipment

Electric / Belt Drive

Safety pressure-relief valve protects machine and user from heat expansion

Upright, oil fired burner delivers high efficiency with diesel fuel, kerosene or home-heating oil

Control panel includes adjustable temperature control plus heavy-duty heater and pump motor switches

5 HP, 230V, 1PH Baldor electric motor (Model 795SS) comes with thermal overload protection and manual reset



Rugged dual-belt drive provides smooth, quiet operation and outstanding reliability



Float tank, with rugged brass input fitting and float valve, helps maintain constant pressure and flow and traps sediment or debris. It is recessed at center of chassis for protection and balance

Ground Fault Circuit Interrupter (GFCI breaker) provides additional protection against shock hazard

Rust-proof polyethylene fuel tank includes easy-access drain and fuel gauge in cap



Hotsy-designed triplex pumps carry a 7-Year limited warranty

Model 795SS
3.5 GPM @2000 PSI



Variable upstream detergent injection ensures high-pressure sudsing

Belt tension adjusts easily by turning a single bolt

Convenient hose-reel bracket accepts swivel or stationary reels

FEATURES

- 2.8 or 3.5 GPM @ 2000 PSI
- Oil Fired Burners
- 208V or 230V, 1PH
- 1330 or 1490 RPM Belt Drive Pumps

Pneumatic tires with inner tubes provide easy maneuverability over pavement or rough terrain



Built-in wand and nozzle holders provide convenient storage

795SS and 790SS Hot-Water ELECTRIC Models

■ Oil Fired Burners

■ 2.8 or 3.5 GPM @ 2000 PSI

■ Hotsy 7-Year Pump Warranty

■ 1330 or 1490 RPM Belt Drive Pumps

Designed for tough, industrial cleaning.

SPECIFICATIONS

BELT DRIVE

MODEL	GPM	PSI	HP	MOTOR RPM	VOLT/PH	AMP	FUEL	PUMP	PUMP RPM	DRIVE	PORTABILITY	HOSE	SHIP WT (lbs)
790SS	2.8	2000	4TEFC*	1725	230/1	20	Oil	Hotsy Triplex	1330	Belt	Std	50'	460
790SS-208	2.8	2000	4TEFC*	1725	208/1	22	Oil	Hotsy Triplex	1330	Belt	Std	50'	460
795SS	3.5	2000	5	3450	230/1	24	Oil	Hotsy Triplex	1490	Belt	Std	50'	500
795SS-208	3.5	2000	5	3450	208/1	27	Oil	Hotsy Triplex	1490	Belt	Std	50'	500

*Totally enclosed fan cooled (TEFC)



Clean better with Hotsy detergents

Hotsy pressure washers clean best when matched with our specially-formulated Hotsy detergents. Nearly all 40 Hotsy detergent formulations contain Hotsy's exclusive advanced-formula HCC additives to help prevent scale build-up and fight corrosion in your equipment. Most Hotsy detergents are USDA and Canadian Agriculture approved. All are highly concentrated, so a little goes a long way.


Spend some time with a Hotsy Expert

Hotsy has more than 130 local Sales & Service Distributors in North America, all factory-trained to properly evaluate your high-pressure cleaning needs.

Rely on our network of seasoned service professionals for the safest, most effective and most efficient solution to your specific cleaning need.



Distributed by:

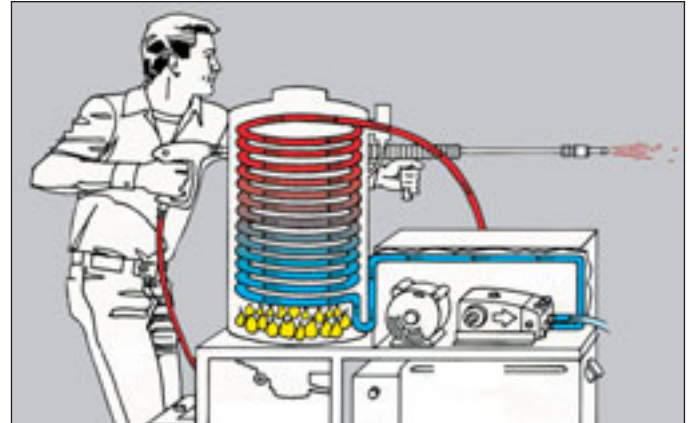

Hotsy's upright burner design provides maximum efficiency for fast heating, easy venting in indoor applications, plus excellent fuel economy.

OPTIONS-795SS and 790SS

- 8" Oil-Fired Draft Dampener *barometric; prevents backdrafts and keeps cold air out.*

Hotsy Accessories customize your application for top performance



360° Pivot and non-pivot hose reels keep hose neatly stored and shop areas safe



High-pressure turbo nozzles for faster cleaning



Remote control box allows pressure washer to be located in one room; controls and wands in other rooms

Telescoping wands extend to 24' to reach high places without scaffolding



Heavy-duty, high-pressure hoses in lengths up to 150-ft.



Rotary surface cleaner attaches to your pressure washer; reduces overspray and zebra striping



Foamers increase dwell time on vertical surfaces, such as tractor trailers, walls and crates

hotsy Nothing Cleans Like a Hotsy!

Tel: (800) 525-1976 Fax: (888) 880-9631
www.Hotsy.com email: info@Hotsy.com
P/N 97-0444 Effective 4/05 Specifications & product descriptions subject to change without notice. ©2005 Hotsy



NOTE: We are constantly improving and updating our products. Consequently, pictures, features & specifications in this brochure may differ slightly from current models. Flow rates & pressure ratings may vary due to variances allowed by manufacturers of our machine components. We attempt to keep our machine performance within ± 5% of listed specifications.